
Heat exchanger Sirac 05

This air/air heat exchanger is used for cooling the inner volume of electrical cabinets

Aerospace & Avionics
Industry
Medical
Naval
Railway



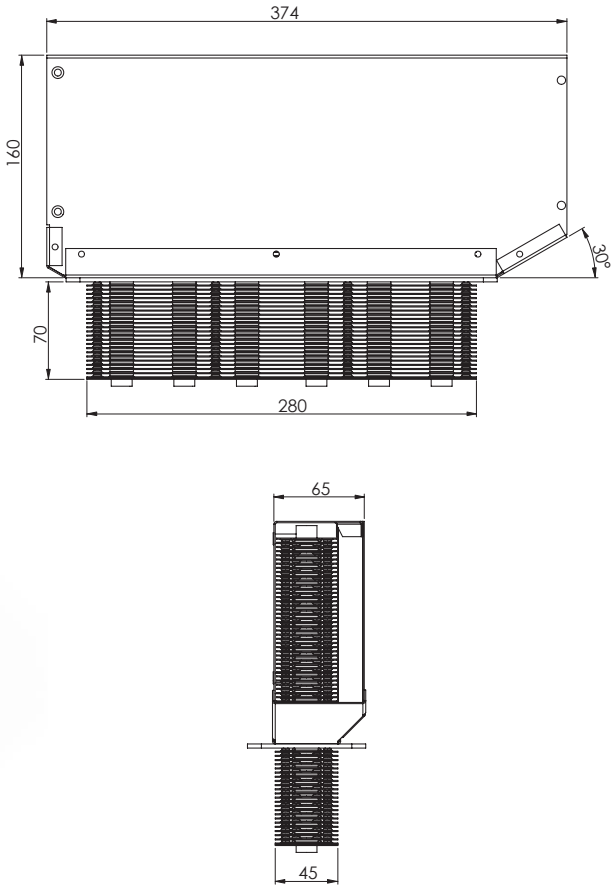

Power
370W

Thermal resistance
90°C/kW

Type	Heat pipes system
Power	370W
Thermal performance/Thermal resistance	<90°C/kW at Tair=20°C
Aeraulics	Air flow rate from 0.05m³/s to 0.2m³/s
Dimensions (mm)	374 x 65 x 236
Working temperature	-25°C to +45°C
Material	Copper / aluminum
Specificities	Air/air heat exchanger

This exchanger is composed of copper heat pipes and aluminum fins.
It is screwed in place in the cabinet, with a horizontal standard working position.
However, it can also work in a vertical position.
Its dimensions can be modified to adjust air flow strength and speed.

Atherm-FRANCE
www.atherm.com
commercial@atherm.net

ATHERM

Your thermal solutions partner